


SATADOM-ML

3SE series

Diagram

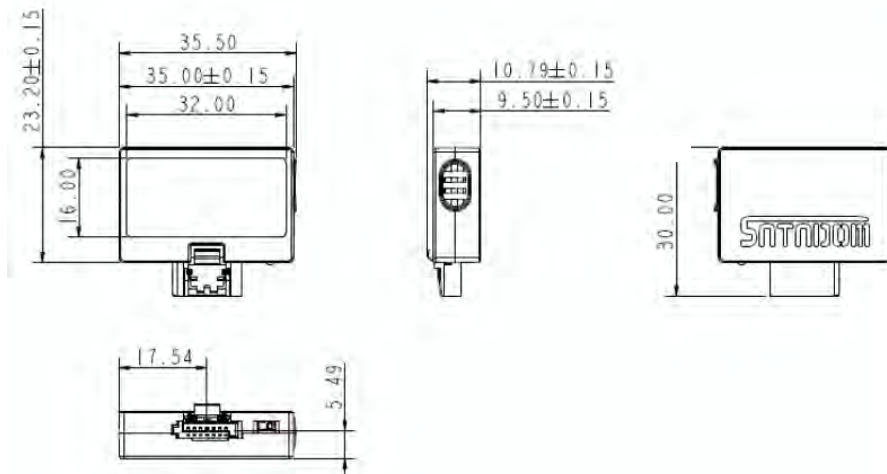

Specifications

| | |
|-------------------------------|---|
| Interface | SATA III |
| Flash Type | SLC |
| P/E cycle | 100,000 |
| Capacity | 8GB~64GB |
| Max. Channels | 4 |
| Sequential R/W (MB/sec, max.) | 490/250 |
| Max. Power Consumption | 2W (5V x 400mA) |
| Thermal Sensor | WT only |
| Extended DRAM buffer | - |
| H/W Write Protect | √ |
| ATA Security | √ |
| S.M.A.R.T. | √ |
| Dimension (WxLxH) | 35.5 X 30 X 9.5 mm |
| Environment | Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours |