


# ServerDOM-L

## 3ME3 series Drawing

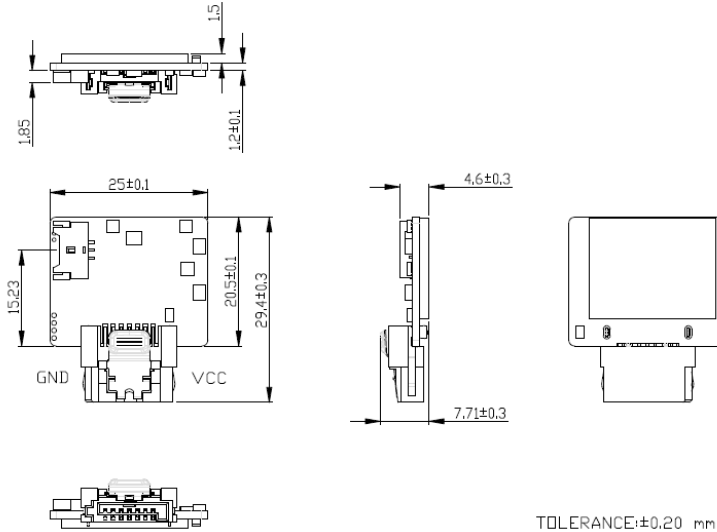

## Specifications

Interface	SATA III 6Gb/s
Flash Type	MLC
Capacity (GB)	16, 32, 64, 128
Max. Channels	4
Sequential R/W (MB/sec, Max.)	410/140
Voltage	+5V ±10%
Max. Power Consumption	2.3W
ATA Security	Supported
S.M.A.R.T.	Supported
Dimension	25 X 29.4 X 7.2 mm
Environmental Specifications	Standard grade: 0°C ~ +70°C Industrial grade: -40°C ~ +85°C
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
OS Support	Windows series, Linux

## Ordering Information

Operation Temp.	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DESNL- 16GD08BCASCA	DESNL- 32GD08BCADCA	DESNL- 64GD08BCAQCA	DESNL- A28D08BCAQCA
Industrial Grade (-40°C ~ +85°C)	DESNL- 16GD08BWASCA	DESNL- 32GD08BWADCA	DESNL- 64GD08BWAQCA	DESNL- A28D08BWAQCA

PN end with A: Pin8+ power cable