


ServerDOM-L

3SE series

Drawing

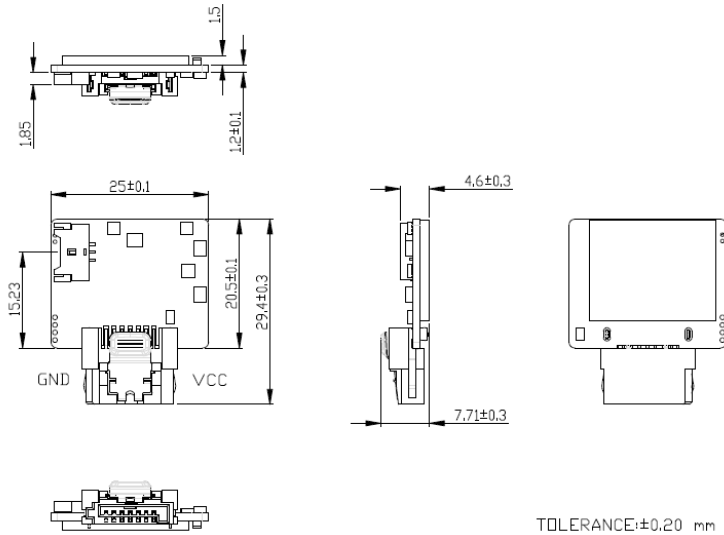

Specifications

Interface	SATA III 6Gb/s
Flash Type	SLC
Capacity (GB)	2, 4, 8, 16
Max. Channels	4
Sequential R/W (MB/sec, Max.)	450 / 200
Voltage	+5V ±10%
Max. Power Consumption	2.5 W
ATA Security	Supported
S.M.A.R.T.	Supported
Dimension	25 X 29.4 X 7.2 mm
Environmental Specifications	Standard operation: 0°C ~ +70°C
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
OS Support	Windows series, Linux

Ordering Information

Operation Temp.	2GB	4GB	8GB	16GB
Standard Grade (0°C ~ +70°C)	DESNL-02GD06SCCSXA	DESNL-04GD06SCCDXA	DESNL-08GD06SCCOXA	DESNL-16GD06SCCOXA
Standard Grade (Pin7+Pin8)	DESNL-02GD06SCCSXB	DESNL-04GD06SCCDXB	DESNL-08GD06SCCOXB	DESNL-16GD06SCCOXB
Industrial Grade (-40°C ~ +85°C)	DESNL-02GD06SWCSXA	DESNL-04GD06SWCDXA	DESNL-08GD06SWCQXA	DESNL-16GD06SWCQXA
Industrial Grade (Pin7+Pin8)	DESNL-02GD06SWCSXB	DESNL-04GD06SWCDXB	DESNL-08GD06SWCQXB	DESNL-16GD06SWCQXB

*PN end with A: Pin8+ power cable
B: Pin8+ Pin 7