


# ServerDOM-V

## 3SE series Drawing

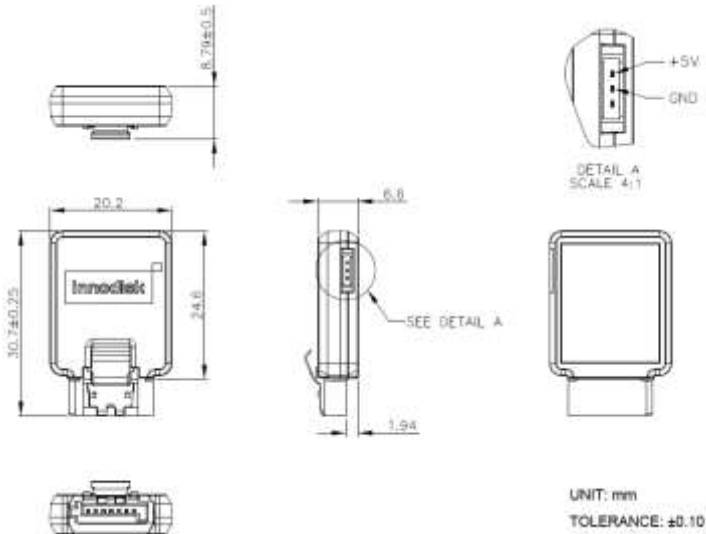

## Specifications

Interface	SATA III 6Gb/s
Flash Type	SLC
Capacity (GB)	2, 4, 8, 16
Max. Channels	4
Sequential R/W (MB/sec, Max.)	450 / 200
Voltage	+5V ±10%
Max. Power Consumption	1.5 W
ATA Security	Supported
S.M.A.R.T.	Supported
Dimension	20.2 X 30.7 X 8.7 mm
Environmental Specifications	Standard operation: 0°C ~ +70°C Storage temp: -55°C to +85°C
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
OS Support	Windows series, Linux

## Ordering Information

Operation Temp.	2GB	4GB	8GB	16GB
Standard Grade (0°C ~ +70°C)	DESNV - 02GD06SCASX	DESNV - 04GD06SCADX	DESNV - 08GD06SCAQX	DESNV - 16GD06SCAQX
Industrial Grade (-40°C ~ +85°C)	DESNV - 02GD06SWASX	DESNV - 04GD06SWADX	DESNV - 08GD06SWAQX	DESNV - 16GD06SWAQX