

R19L100-67N1-NI

19" G-WIN Full IP67 NVIS Display



KEY FEATURES

- Totally sealed Full IP67 aluminum compact housing design
- 19-inch 1280 x 1024 panel with Projected Capacitive touch screen
- -20°C to 60°C wide operating temperature
- Fanless, streamlined enclosure for highly efficient heat dissipation
- Rugged Front Anti-Impact Design
- Front control membrane keys lockable by software
- Full IP67 male connectors with external female cables
- 9~36V DC Isolation Wide Range Power Input. Optional Ignition on/off control function.
- Support Day Mode/NVIS Mode
- Compliance MIL-STD-3009

INTRODUCTION

Winmate's Defence NVIS Display Series is engineered for mission-critical performance in military and defense operations. Available in sizes from 8.4 inch to 21.5 inch, these displays feature a variety of touchscreen options, including 5-wire/4-wire resistive and projected capacitive (PCAP) technologies. Built to support both Day Mode and NVIS Mode, each unit complies fully with MIL-STD-3009, ensuring compatibility with night vision goggles (NVGs) without compromising visibility or safety. With rugged anti-corrosion housing, wide -20°C to 60°C temperature tolerance, and IP65/IP67 protection, this series offers dependable performance in harsh, tactical environments.

SPECTRUM DIAGRAM

Image 1: RGB Color Gamut Comparison (CIE 1931 Chromaticity Diagram)

This diagram compares the color gamut of LCDs using different backlights—CCFL, White LED, and RGB LED—against the NTSC television color gamut. Each triangle shows the color range that each backlight technology can produce. RGB LED offers the widest gamut, while CCFL has the smallest.


Image 2: CIE 1976 Chromaticity Diagram

This chart maps various colors in the CIE 1976 uniform chromaticity space. It shows specific color targets like GTLS GREEN, GTLS ORANGE, and their positions relative to the white point (WHITE LOCUS). This is typically used for precise color calibration in display and lighting technologies.

Image 3: NVG Spectral Response Curve


This graph shows the spectral sensitivity of Night Vision Goggles (NVG), Class A and Class B. It plots the relative response (%) over wavelengths from 450 nm to 950 nm. Both classes are most sensitive to wavelengths from about 625 nm (red) to 900 nm (near-infrared), indicating their performance range in low-light environments.

Image 1

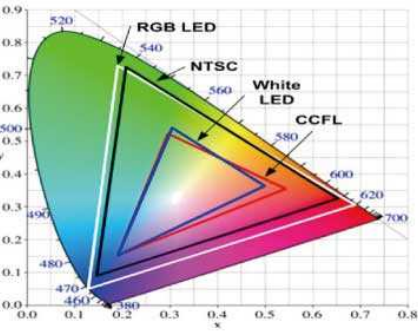


* Reference: Du, K., Liu, Y., Song, T., & Xue, Q. (2021). Color-independent visible light communications based on color space: State of the art and potentials. Journal of Communications and Networks, 23(1), 1–15. Figure 2: CIE1931 color space chromaticity diagram, p. 4.

Image 2

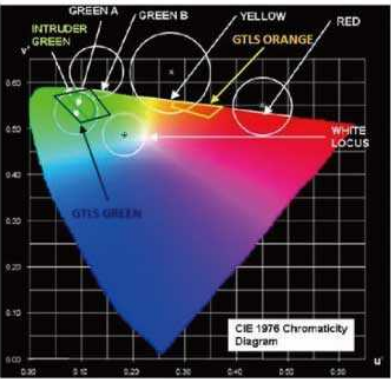

* Reference: Petr, P. (2010). Osvedčení pilotů i ch a vojensk ch hodinek — č 6 st sedm 6 . [Blog post]. Chronomag Forum.

Image 3

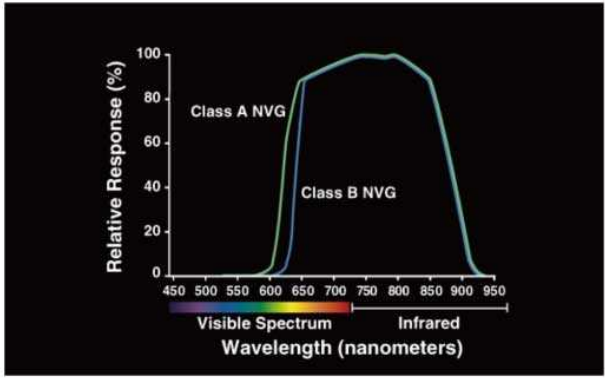

* Reference: Transport Canada. (n.d.). Civil Aviation Use of NVG. Operational Standards Division, p. 9.

SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen Bonding with Panel	Resolution	1280x1024
Size	19.0 inches	Contrast Ratio	1000:1
Panel Brightness	1000/NVIS nits	Display Color	16.7M Colors
View Angles	85,85,80,80	Active Area	376.32x301.06 mm
Mechanical			
Dimension	474 x 410 x 111 mm	Weight	9.8 kg
Mounting	Panel mount VESA mount (Optional)	Enclosure	Aluminum Housing
Cooling System	Fanless Design	Cut out	462 x 386 mm
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	-10°C to 55°C -40°C to 70°C (with intelligent heater)
Storage Temperature	-30°C to 70°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP67
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 9~36V DC	USB Port	1x M12 type connector for Touchscreen via USB signal
Serial Port	1 x M12 type connector for Touchscreen via RS232 signal (Optional)	Video	1x M12 type connector for VGA input 1x Waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		
Control			
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
Accessory			
Accessory	External open wire Power cable with waterproof connector External USB cable with waterproof connector External VGA cable with waterproof connector Waterproof caps Mounting clips VESA screws	Optional Accessory	100~240V AC to DC 50W Adapter with power cord (Optional) External COM cable with waterproof connector (Optional) External HDMI cable with waterproof connector (Optional)
System Specification			

