



CFexpress 4IE3

HIGHLIGHT FEATURES


- PCIe Gen 3 x2, NVMe 1.4
- Ultra iSLC technology
- Stable sustained performance
- LDPC ECC engine supported
- 256 bit AES hardware based encryption
- Dynamic Thermal Management

SPECIFICATIONS


Model Name	CFexpress 4IE3
Flash Type	iSLC (3D TLC)
Interface	PCIe Gen 3 x2
Form Factor	CFexpress 1.0 Type B
Capacity	40GB ~ 320GB
Sequential R / W (MB/sec, max.)	1,750 / 1,600
P/E Cycle	100,000
TBW (Max.)	16,877
Storage Temperature	-40°C ~ 85°C
Max. Power Consumption	3W
Max. Channels	4
External DRAM Buffer	N
H/W Write Protect	Y (Optional)
S.M.A.R.T.	Y
AES	Y (Optional)
TCG Opal	Y (Optional)
Dimension (W x L x H/mm)	29.6 x 38.5 x 3.8
Vibration	20G@[7 ~ 2000Hz]
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	5 Years

DIAGRAM

W/O WRITE PROTECT SWITCH

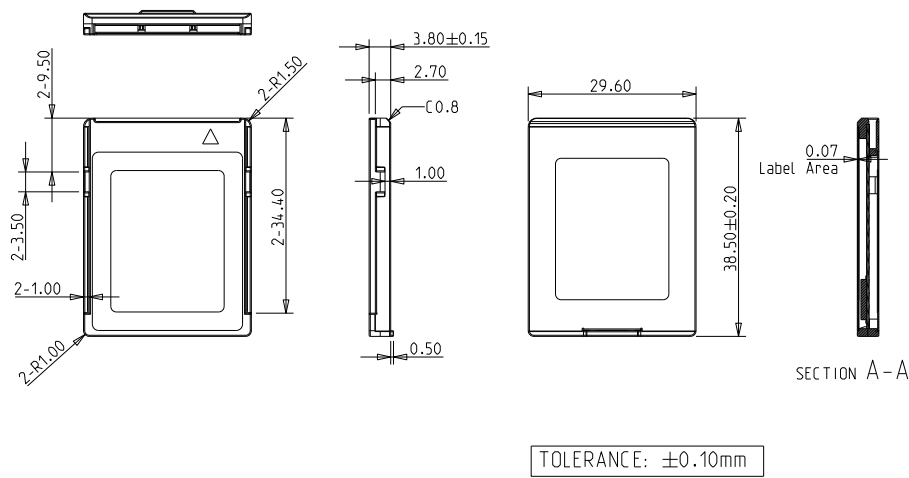

W/ WRITE PROTECT SWITCH

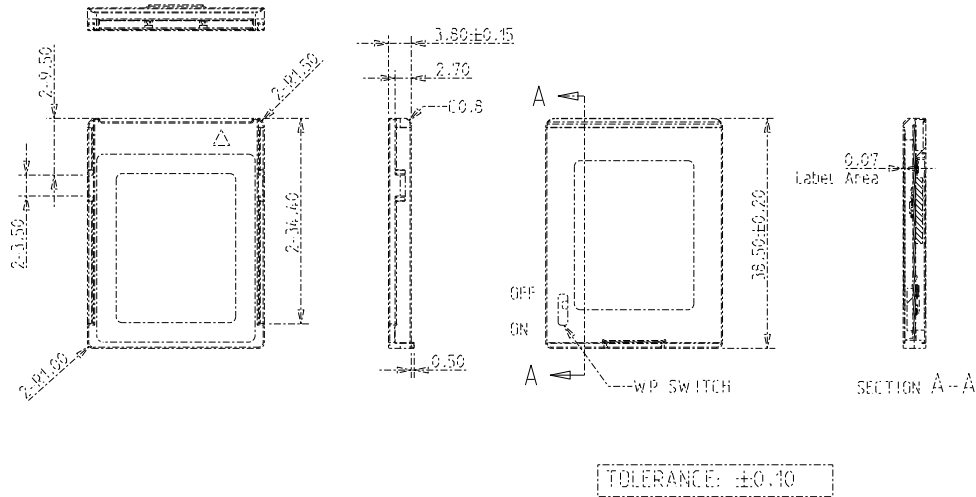

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)
40GB	DHCFX-40GDH1KCADF(W)
80GB	DHCFX-80GDH1KCAQF(W)
160GB	DHCFX-A60DH1KCAQF(W)
320GB	DHCFX-D2GDH1KCAQF(W)

W : H/W Write Protect
 For TCG Opal function, the PN Code 10th ~ 12th will be DH2.