

IoT SuperServer SYS-110P-FDWTR



More details here

Key Applications

Multi-Access Edge Computing, Outdoor DU of 5G Application, Flex-RAN, Open-RAN vBBU,


Key Features

- Socket P+ (LGA-4189) support 3rd Gen Intel® Xeon® Scalable processors;
- 8 DIMMs; Up to 2TB 3DS ECC DDR4-3200: RDIMM/LRDIMM;
- 2x 2.5" drive bays; 1 M.2 NVMe OR 1 M.2 SATA3;
- 6 heavy duty fans with optimal fan speed control; 1 Air Shroud(s);
- 600W Redundant Power Supplies Level (92%+);



Form Factor	1U Rackmount Enclosure: 437 x 43 x 429mm (17.2" x 1.7" x 16.9") Package: 686 x 203 x 610mm (27" x 8" x 24")
Processor	3rd Gen Intel® Xeon® Scalable processors Single Socket LGA-4189 (Socket P+) supported TDP up to 205W;
System Memory	8 DIMM slots Up to 2TB ECC RDIMM/LRDIMM, DDR4-3200MHz
Drive Bays	2x 2.5" SATA drive bays;
Expansion Slots	1 PCIe 4.0 x16LP slot(s) 2 PCIe 4.0 x16 FHFL slot(s)
On-Board Devices	SATA: SATA3 (6Gbps); RAID 0/1 support Chipset: Intel® C621A Network Connectivity: 2x 10GbE BaseT port(s) IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	USB: 2 USB 2.0 port(s) (2 front) 2 USB 3.2 port(s) (2 front) Video: 1 VGA port(s)

(Front View - System)

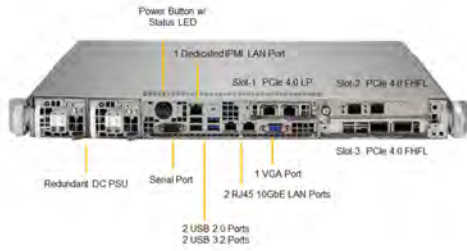

(Rear View - System)



System Cooling	4 heavy duty fan(s)
Power Supply	1U 600W Redundant short depth DC48V input redundant power supply Dimension (W x H x L): 54.5 x 40 x 220 mm
Management	IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment CPU thermal trip support, PEPI
Dimensions and Weight	Height: 1.7" (43 mm) Width: 17.2" (437 mm) Depth: 16.9" (429 mm) Gross Weight: 25.2 lbs (11.43 kg) Packaging: 8" (H) x 27" (W) x 24" (D) Available Color: No Paint
Operating Environment	Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12SPW-TF
Chassis	CSE-515B-R601W