

FatTwin A+ Server AS -F1114S-FT

4U 8-node FatTwin with 4 fixed 2.5" SATA bays per node



More details here

Key Applications

Hyperscale / Hyperconverged, HPC, Cloud Computing, Data center, Cluster Node, HPC cluster computer nodes,

Key Features

- Eight **hot-pluggable** systems (nodes) in a 4U form factor. Each node supports the following;
- Single AMD EPYC™ 7003/7002 Series Processor (The latest AMD EPYC™ 7003 Series Processor with AMD 3D V-Cache™ Technology requires BIOS version 2.3 or newer);
- Up to 4TB ECC 3DS LRDIMM up to DDR4-3200MHz; 16 DIMM slots;
- Expansion slots: 2 PCIe 4.0 x16 LP
1 PCIe 4.0 x16 AIOM slot;
- Up to 4 fixed internal 2.5" drive bays
4 SATA3 by default or optional 2 NVMe via additional cable
M.2 Interface: 2 SATA/NVMe, PCIe 4.0 x4
M.2 Form Factor: 2260, 2280, 22110
M.2 Key: M-key;



Form Factor

4U Rackmount
Enclosure: 448 x 177 x 737mm (17.63" x 6.96" x 29")
Package: (28.3" x 15" x 42.4")

Processor

Single Socket SP3
AMD EPYC™ 7002/7003 Series Processors

System Memory

Slot Count: 16 DIMM slots
Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM

Drive Bays Configuration

Default: Total 4 bays

- 4 internal fixed 2.5" SATA drive bays

Option A: Total 2 bays

- 2 internal fixed 2.5" NVMe* drive bays

(*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details)

M.2: 2 M.2 PCIe 4.0 x4 NVMe/SATA slots (M-key 2260/2280/22110)

Expansion Slots

Default



- 2 PCIe 4.0 x16 LP slots
- 1 PCIe 4.0 x16 AIOM slot (OCP 3.0 compatible)

On-Board Devices

SATA: SATA (6Gbps)
Chipset: System on Chip
Network Connectivity: Ethernet
IPMI: Support for Intelligent Platform Management Interface v.2.0
IPMI 2.0 with virtual media over LAN and KVM-over-LAN support

Input / Output

LAN: 1 RJ45 1 GbE Dedicated BMC LAN port
USB: 2 USB 3.0 ports(front)
Video: 1 VGA port(Front)
TPM: 1 TPM header

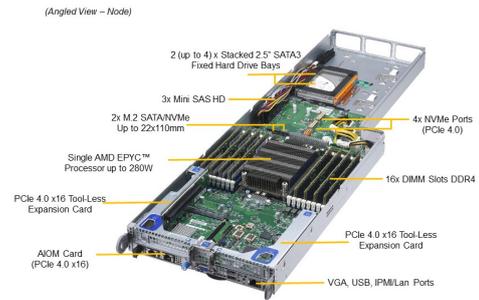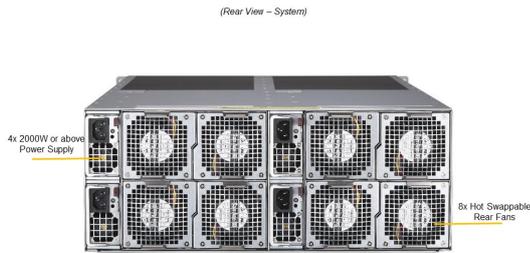

System Cooling	Fans: Up to 8x 8cm heavy duty fans with optimal fan speed control (1 fans per node)
Power Supply	4x 2200W Redundant (2 + 2) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 256MB SPI Flash EEPROM
Management	Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); KVM with dedicated LAN ; IPMI 2.0; Watch Dog
PC Health Monitoring	CPU: 7 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitorin Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 204.8 lbs (90.71 kg) Net Weight: 108.5 lbs (49.21 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super H12SFF-AN6
Chassis	CSE-F418IF4-R2K20BP