

W10IAN3S-OFH2

10.1" Intel® Alder Lake-N N100 Open Frame Panel PC



KEY FEATURES

- 10.1" WXGA TFT LCD
- Intel® Alder Lake-N N100 Processor
- 1 x SO-DIMM DDR5-4800, max. 16GB
- 2 x 2.5 Gigabit Ethernet
- Supports 1 x HDMI, 1 x USB 3.2 Type-C with DP-Alt, 2 x USB 3.2 Gen 2 Type-A, 4 x USB 2.0, 4 x COM
- Supports VESA Mount

INTRODUCTION

Winmate Open Frame Panel PC Series delivers versatility and performance for diverse industrial applications. Available in sizes from 5.7" to 24", these wide, rectangular panel PCs support multiple operating systems and advanced processors for seamless integration. Featuring resistive and PCAP touch options, they offer precise and intuitive operation. The open-frame design ensures easy installation into cabinets or kiosks, making them ideal for factory automation, retail, and interactive digital signage.

SPECIFICATIONS

Display			
Resolution	1280x800	Size	10.1 inches
Contrast Ratio	800:1	Panel Brightness	350.0 nits
View Angles	85,85,85,85	Active Area	216.96x135.6 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Processor N100 6M Cache, up to 3.40 GHz	Memory	1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 4TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB(Only available when NVMe SSD is not present) (Optional)	Ethernet controller	2 x Intel® 2.5 Gigabit Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 24.04(Do not support Wake on Touch) (Optional)
Mechanical			
Dimension	239 x 174 x 45 mm	Weight	1.3 kg
Mounting	Open frame Panel mount (Optional) VESA mount (Optional)	Enclosure	Metal Housing

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC
---------------	---------

IO Ports

Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	2 x USB3.2 Gen1x1 (Type-A) 1 x USB 3.2 Gen 2x1 Type C connector,support DP Alt. mode
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x HDMI 2.0b (Optional)
Audio	2 x Speaker	Expansion Port	1 x M.2 2280 M-Key Slot (for NVMEI SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module)
LAN	2 x 2.5 Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob		

Control

Button	1 x Power Button 1 x Reset Button
--------	--------------------------------------


Accessory

Accessory	100~240V AC to DC Adapter Power Cord VESA screws
-----------	--

Power

Power Rating	12V DC	Adapter	12V 50W
--------------	--------	---------	---------

DIMENSIONS UNIT:MM

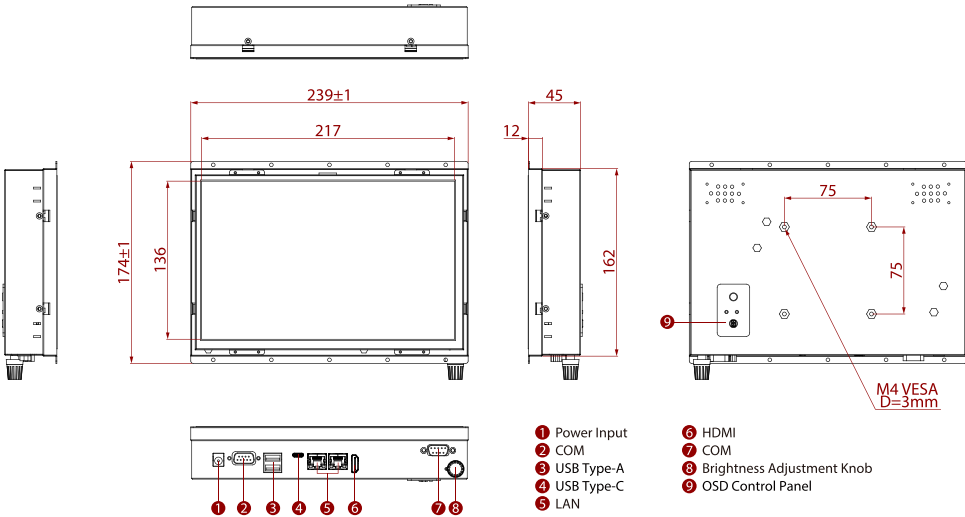

NOTE

- 1. This is a simplified drawing; some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.