



Features

- Flat-bezel LCD with LED backlight
- Intel® Core™ i5/ i3 and Pentium® processor
- Two 204-pin DDR3 SO-DIMM slot (system max. 16GB) preinstalled with 4GB (2GB x 2)
- Projected capacitive touchscreen and 5-wire resistive type touchscreen supported
- Wi-Fi 802.11b/g/n wireless
- EM or Mifare RFID reader
- Built-in 2-megapixel webcam with AF, AE and AWB capabilities
- Built-in two 2W speakers and microphone
- IP 64 compliant front panel
- Auto dimming control
- Light fanless technology design
- Type K thermocouple temperature sensor
- Wide range 9~36 VDC input



Specifications

	Model	AFL2-W15B-H61		
LCD Specifications	Size	W15.6" (16:9)		
	Resolution	1366 (W) x 768 (H)		
	Brightness (cd/m ²)	300		
	Contrast Ratio	500:1		
	LCD Color	16.7M		
	Pixel Pitch (mm)	0.252 (H) x 0.252 (V)		
	Viewing Angle (H-V)	170° / 160°		
	Backlight MTBF	50,000 hrs (LED backlight)		
Touch	Touch Screen	5-wire resistive type with RS-232 interface / projected capacitive type with USB interface		
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5404		
System	CPU	2nd/3rd Generation Intel® Core™ i7/i5/i3 and Pentium® processors		
	Chipset	Intel® H61		
	RAM	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)		
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0		
	Audio Codec	Realtek ALC892 HD Audio codec		
	Storage	CF Type II socket 2.5" SATA 3Gb/s HDD bay		
	Input / Output		2 x RS-232 (DB-9 connector) 1 x GbE LAN (RJ-45 connector) on left side 1 x RS-422/485 (RJ-45 connector) 3 x USB 2.0 (two on the bottom, one on the left) 2 x USB 3.0 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out, MIC on left side	1 x VGA port 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack 1 x Type K connector
Other Features	Audio	AMP 2W + 2W (internal speaker)		
	Camera	2-megapixel with low light function		
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)		
	MSR Card Reader	MSR card reader (optional)		
	TPM	Reserved by pin-header		
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key		
	Ambient Light Sensor	Yes		
	Infrared Remote Controller	Yes		
System Cooling	Light fanless (smart fan operates above default temperature setting)			
Connectivity	Wireless	IEEE 802.11b/g/n		
Physical	Construction Front Panel	PC + ABS Plastic		
	Mounting	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm		
	Color	Black		
	Dimensions (WxHxD) (mm)	399.4 x 271.2 x 58.8		
	Weight (N/G)	4.5 kg / 6.5 Kg		
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C		
	Storage Temperature (°C)	-20°C ~ 60°C		
	Humidity	10% to 95% (non-condensing)		
	IP Level	IP 64 compliant front panel		
	Safety&EMC	CE / FCC		
Power	Power Supply	90W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC		
	Power Requirement	9 ~ 36 VDC		
	Power Consumption	19V@3.95A (Intel® Core™ i3-2120 CPU with 4GB 1333 Mhz DDR3 memory)		

Ordering Information

Part No.	Description	
Core i5	AFL2-W15B-H61-i5/R-R13	15.6" 300cd/m ² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-i5/PC-R13	15.6" 300cd/m ² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Core i3	AFL2-W15B-H61-i3/R-R13	15.6" 300cd/m ² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-i3/PC-R13	15.6" 300cd/m ² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Pentium	AFL2-W15B-H61-P/R-R13	15.6" 300cd/m ² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-P/PC-R13	15.6" 300cd/m ² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13

















Options

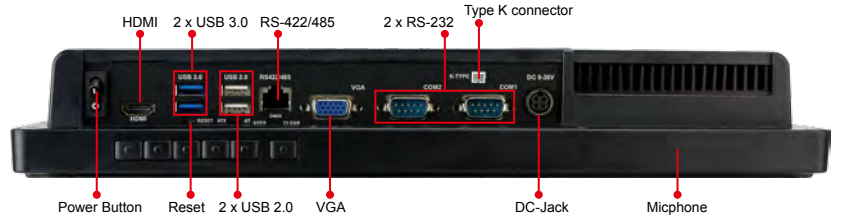
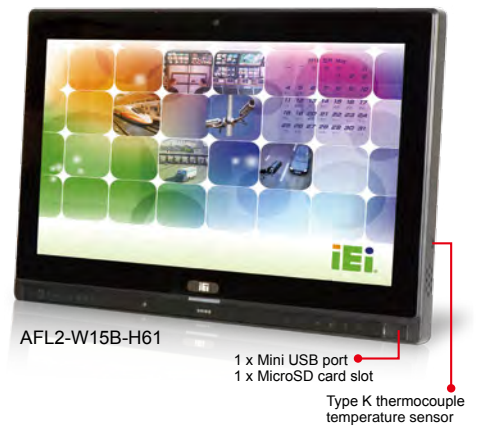
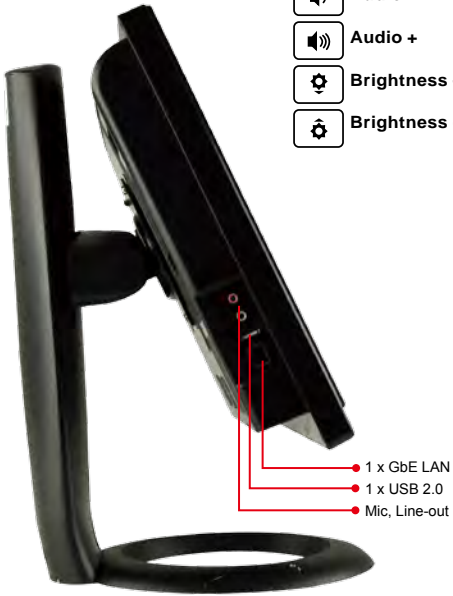
Item	AFL2-W15B-H61
Panel Mounting Kit	AFL2PK-W15B
Wall Mounting Kit	AFLWK-19B
Rack Mounting Kit	AFL2RK-W15B
Arm	ARM-11-RS/ARM-31-RS
Stand	STAND-A21-R10/ STAND-C19-R10/ STAND-210-R11
Magnetic Stripe Reader	AFL2P-W15BMSR-U-R10
Trusted Platform Module (TPM)	TPM-IN01-R11
EM RFID Reader	AFL2-EM-RFID-KIT01-R10
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11
OS: Win XPE (2GB CF Card)	AFL2CF-15A-H61-XPE-2G-R13
OS: Win XPE (4GB CF Card)	AFL2CF-15A-H61-XPE-4G-R13
OS: Win 7 Embedded (4GB CF Card)	AFL2CF-15A-H61-WES7P-4G-R13 (for Projected Capacitive Touch) AFL2CF-15A-H61-WES7E-4G-R13 (for Resistive Touch)

Packing List

Item	P/N	Q'ty	Description
Utility CD	7B000-000957-RS	1	drivers and user manual
One Key Recovery CD	7B000-000781-RS	1	
Power Adapter	63040-010090-101-RS	1	FSP090-DIEBN2; 90~264VAC input; 90W; 19VDC output
Power Cord	32702-000401-100-RS	1	European, 1500mm
Power Transfer Cord	32702-000300-100-RS	1	
RJ-45 to DB-9 COM Port Cable	32005-000200-200-RS	1	
IR Remote Controller	7Z000-SLPCB005-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3 x 4 for securing HDD
M4 Screw Pack	44033-040061-RS	4	M4 x 4 for VESA screw
Temperature Sensor Cable	32133-004300-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

Function Keys

 Fn	
 Backlight On/Off	 Fn +  RFID enable / disable
 Audio -	 Fn +  Audio mute
 Audio +	 Fn +  Camera enable / disable
 Brightness -	 Fn +  Front side Mini USB & MicroSD enable / disable
 Brightness +	 Fn +  Power on / off



AFL2-W15B-H61 Dimensions

(Unit: mm)

